

3MP Outdoor Wi-Fi PT Camera

S2-3WL

Introduction



S2-3WL is an outdoor dual-light PT camera developed by our company, with 3MP HD resolution, supporting BT5.0, 360° panoramic monitoring, Wi-Fi network connection, supporting human detection, human tracking, regional vigilance, dual-light vigilance, and full-color night vision. It is suitable for family outdoor, villas, parks, scenic spots, parking lots and other monitoring places.

Main Features



Wi-Fi



Human
Detection



Human
Tracking



Two-way
Talk



Dual Light
Alert



Voice Alarm
Bells



Full Color
Night Vision



Area
Vigilance



360°
Panorama



Cloud
Storage




TF Card
Storage



IP66

Dimension

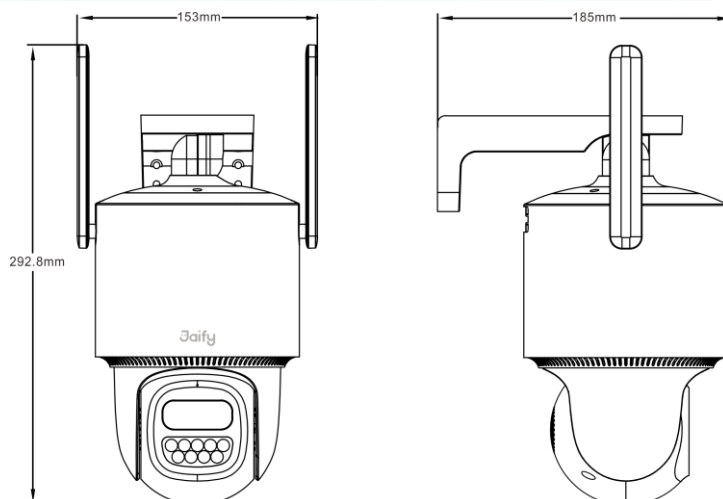

Product Parameters

| | |
|---------------------------------|--------------------------------------------------------------------------------------------|
| Model | S2-3WL |
| Camera | |
| Resolution | 3MP |
| Image Sensor | 1/2.9" Low illumination Sensor |
| Min. Illumination | Color: 0.1Lux @(F2.0,AGC ON); 0 Lux with IR B/W: 0.01 Lux @ (F2.0,AGC ON),0 Lux with IR |
| Lens | 4(±0.3)mm@F2.0; Diagonal: 95°, Horizontal: 79°, Vertical: 42° |
| Shutter Speed | Self-adaptive shutter |
| Fill Light | 9*850nm IR fill lights&9*white led fill lights |
| Night Vision | Full-color night vision/Infrared night vision/Dual-light alert |
| DNR | 3D DNR |
| Audio Input | Built-in microphone |
| Audio Output | Built-in speaker |
| PT Angle | Horizontal 355°, vertical 95° |
| Video Storage | TF card storage/Cloud storage |
| Image | |
| Max. Resolution | 2304*1296 |
| Frame Rate | 20FPS |
| Buttons & Interfaces | |
| Storage Interface | 1*TF card storage interface (max. 256G) |
| Power Interface | 1*DC12V power interface |
| Wired Network | 1*RJ45 (10M / 100M Adaptive Ethernet Port) |
| Button | 1*Reset button |
| Compression | |
| Video Compression | H.265/H.264 |
| Audio Compression | G.711A |
| Network | |
| Protocol | JFTECH cloud proprietary protocol |
| Interface Protocol | JFTECH cloud proprietary protocol |
| General Function | Anti-Flicker, Dual-Stream, Heart Beat, Password Protection, Watermark |
| Wireless Parameters | |
| Wi-Fi Standard | IEEE 802.11b/g/n |
| Frequency Range | 2.4 GHz ~ 2.4835 GHz |
| General | |
| Operating Conditions | -10°C ~ 50°C, Humidity 95% or less (non-condensing) |
| Power Supply | DC 12V/1A |
| Night Vision Distance | 30m |
| Pickup Distance | 5m |
| Housing Material | ABS, PC |
| Net Weight | About 723g |
| Dimensions | About 153mm*185mm*293mm |
| IP Grade | IP66 |