

3K⁺ Outdoor 4G Dual-lens PT Camera

S2-6G-D2

Introduction



S2-6G-D2 is an outdoor 4G dual-lens PT camera developed by Jaify, with dual-lens design, which can monitor two different areas at the same time, with 3K⁺ (6MP) resolution. It features a removable SIM card slot for 4G network connectivity, supporting human detection, human tracking, regional vigilance, dual-light alert, and full-color night vision. IP66-rated waterproof and dustproof for outdoor use. It is suitable for family outdoor, villas, parks, scenic spots, parking lots.

Main Features



4G Connected



Human Detection



Human Tracking



360° Panorama



Two-Way Talk



Voice Alarm Bells



Full Color Night Vision



Dual-Light Alert



TF Card Storage



Cloud Storage




IP66



Two-way Monitoring

Dimension

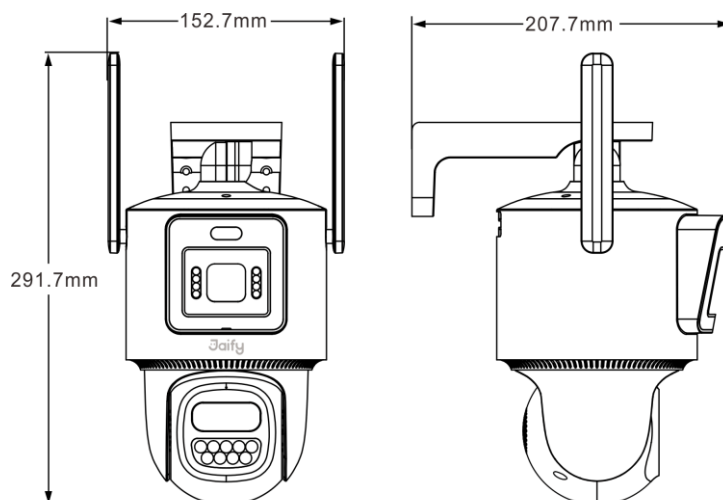

Product Parameters

Camera	
Model	S2-6G-D2
Resolution	3K*(6MP)
Image Sensor	2*1/2.9" High-performance CMOS sensor
Min. Illumination	Color: 0.05Lux @ (F1.6, AGC ON), 0 Lux with light B/W: 0.05 Lux @ (F1.6, AGC ON), 0 Lux with IR
Lens	4mm @F1.6+6mm @F1.6
Field Of View	Fixed Lens: Diagonal: 95°, Horizontal: 79°, Vertical: 42° PT Lens: Diagonal: 60.5°, Horizontal: 50.5°, Vertical: 29°
Shutter Speed	Self-adaptive shutter
Fill Light	17*850nm IR fill lights&17*white led fill lights
Night Vision	Full-color night vision/Infrared night vision/Dual-light alert
DNR	3D DNR
Audio Input	Built-in microphone
Audio Output	Built-in speaker
PT Angle	Horizontal 355°, vertical 95°
Video Storage	TF card storage/Cloud storage
Image	
Max. Resolution	2304*2592
Frame Rate	12FPS
Buttons & Interfaces	
Storage Interface	1*TF card storage interface (max. 256G)
Power Interface	1*DC 12V/1A power interface
SIM Card Interface	1*Self-popping SIM card slot
Wired Network	1*RJ45 (10M / 100M Adaptive Ethernet Port)
Button	1*Reset button
Compression	
Video Compression	H.265/H.264
Audio Compression	G.711A
Network	
One-touch Provisioning	4G network provisioning
Protocol	JFTECH cloud proprietary protocol
Interface Protocol	JFTECH cloud proprietary protocol
General Function	Anti-Flicker, Dual-Stream, Mirroring, Password Protection, Watermark
Wireless Parameters	
4G Frequency Band	EU Version: LTE FDD: B1/B3/B5/B7/B8/B20/B28 APAC Version: LTE FDD: B1/B3/B5/B8 LTE TDD: B34/B38/B39/B40/B41
General	
Operating Conditions	-10°C ~ 50°C, Humidity 95% or less (non-condensing)
Power Supply	DC 12V/1A
Night Vision Distance	30m
Pickup Distance	5m
Housing Material	ABS, PC
Net Weight	About 799g
Dimensions	About 153mm*208mm*292mm
IP Grade	IP66

